


COLORAMA DIMOUT

- Exclusive Colorama dimout fabric with colour matched reverse for a uniform appearance inside and out
- Cradle to Cradle Certified™ Bronze
- Standard 100 by Oeko-Tex® certified, free from harmful substances
- Washable up to 72°
- Proven acoustic properties

APPLICATIONS

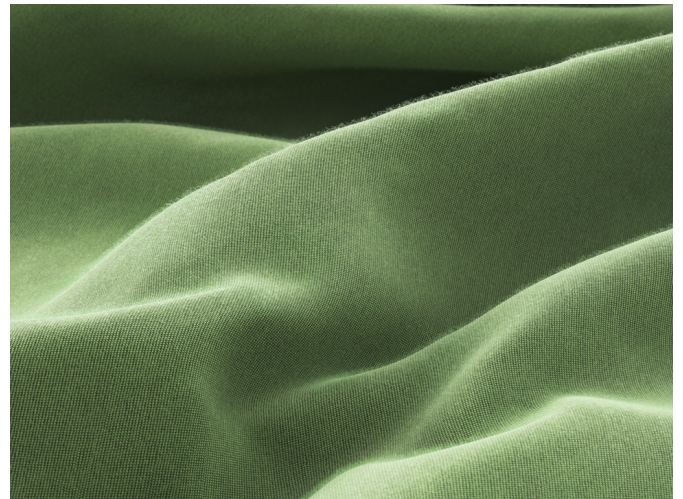

FABRIC PROPERTIES

	Dimout
	Polyester
	350 g/m ²
	0.80 mm
	305 cm
	310 cm

FEATURES / TECHNICAL PROPERTIES

	5
	Alpha-w = 0.60 / 0.80
	Flame retardant
	Applicable in humid areas
	Fabric must be turned
	Fabric must be turned
	Oeko-Tex, Cradle to Cradle
	Special colours from 240 m

WASHING INSTRUCTIONS



FIRE PROTECTION

Class 1 (EN 13773)
Type B (BS 5867-2)



Colorama Dimout
OPTICAL AND SOLAR COEFFICIENTS (± 5%, DIN EN 410)

Colour	T _v	T _s	R _s	A _s	F _c	g _{tot}
408	0.1	0.1	31.3	68.6	0.72	0.52
409	0.0	0.1	18.0	81.9	0.80	0.58
410	0.0	0.1	27.4	72.5	0.74	0.54
411	0.0	0.1	20.9	79.0	0.79	0.57
422	0.0	0.1	23.2	76.7	0.77	0.55
429	0.0	0.1	26.2	73.7	0.75	0.54
446	0.0	0.1	19.7	80.2	0.79	0.57
463	0.1	0.1	29.9	70.0	0.73	0.52
478	0.0	0.1	21.0	78.9	0.78	0.57
479	0.0	0.1	25.3	74.6	0.76	0.55

T_v Visible light transmission

R_s Solar reflectance

F_c Shading factor

T_s Solar transmission


A_s Solar absorption

g_{tot} Total g-value

F_c + g_{tot}: Value calculated with glass: 0.72 / U_g = 1.6 W/m² K, DIN EN 13363-1

Colorama Dimout


408




409



410




411



422



429



446



463



478



479

Colours shown are not binding